


Working Height Max.
Overall Lift Capacity Max.
Overall Width
Overall Length
Overall Weight


6.5 m (21'4") 240 kg (529 lb) 0.76 m (2'6") 1.49 m (4'11") 950 kg (2,094 lb)

LS0507HM Electric Scissor Lifts H-Drive

LS0507HM SPECIFICATIONS >>>

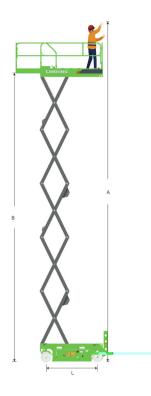





DIMENSIONS	
A. Working Height Max.	6.5 m (21'4")
B. Platform Height Max.	4.5 m (14'9")
C. Platform Height (Stowed)	0.95 m (3'1")
D. Platform Length	1.3 m (4'3")
E. Platform Width	0.72 m (2'4")
F. Extension Deck (Roll Out)	0.6 m (1'11")
G. Overall Length	1.49 m (4'11")
H. Overall Length (Without Ladder)	1.42 m (4'8")
I. Overall Width	0.76 m (2'6")
J. Stowed Height (Rails Up)	2.02 m (6'8")
K. Stowed Height (Rails Down)	1.67 m (5'6")
L. Wheelbase	1.15 m (3'9")
M. Ground Clearance (Pothole Raised)	60 mm (2.3")
N. Ground Clearance (Pothole Deployed)	20 mm (0.79")

PRODUCTIVITY	
Overall Lift Capacity Max.	240 kg (529 lb)
Extension Deck Capacity	110 kg (242 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2/1
Drive Speed (Stowed)	1.5 km/h (0.9 mph)
Drive Speed (Raised)	0.3 km/h (0.2 mph)
Turning Radius (Inside/Outside)	0.25 / 1.6 m (10" / 5'3")
Lift/Lower Time	23 / 21 s
Gradeability	25 %
Tilt Sensor Activation (Side to Side/Front to Back)	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	305 x 100 mm (1' x 3.9")

POWER	
Battery	24 V / 100 Ah
Charger	24 V / 15 A
Lifting Motor	24 V / 3.3 kW
Hydraulic System Volume	4.5 L (1 gal 2 pt)
Hydraulic Tank Capacity	5 L (1 gal 3 pt)

WEIGHT	
Overall Weight	950 kg (2,094 lb)